


WIRELESS CONTROL AT YOUR FINGERTIPS.

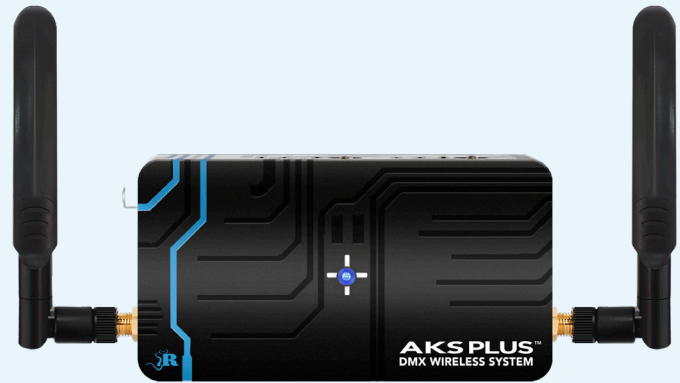

RATPAC AKS PLUS™ DMX WIRELESS SYSTEM

The AKS Plus transmitter is designed to be used with industry standard, tablet-based DMX lighting control apps and is also compatible with larger, professional lighting consoles. The AKS Plus can receive an sACN or Art-Net signal from the control source and broadcast one DMX universe to all linked CRMX-enabled lighting fixtures & receivers.

This versatile transmitter is designed with other input methods including an RJ45 port that can receive sACN, Art-Net, as well as a mini XLR port. Single-universe input sources can be broadcast to all linked CRMX-enabled lighting fixtures & receivers. The AKS Plus has the battery life to run all day on set, up to 20 hours, and a line-of-sight range of ¼ mile or 400 meters.



FEATURES

- 20 hours(+) of battery life
- CRMX transmitter range up to ¼ mile or 400 meters
- L2-net Ethernet, Wi-Fi bypass
- Includes 3-pin female to 5-pin male DMX adaptor cable 5-pin female to 3-pin female DMX adaptor cable
- Compatible with all Wi-Fi tablets and smartphones
- Uses Ethernet or Wi-Fi for Art-Net data input
- Error correction, 128-bit encryption
- Intelligent 2.4GHz frequency hopping

- Compatible with all wireless Ratpac products and CRMX compatible devices

INPUT

- +/-5 VDC

DIMENSIONS

- 2.75" (H) x 3.75" (W) x 2" (D)
- 6.98 cm (H) x 9.52 cm (W) x 5.08 cm (D)

WEIGHT

- 1 lb/ 454 g

ANTENNAS

- 2.4 GHz 5dBi omnidirectional antenna
- RP SMA plug connector

MODEL

- 803509-A.K.S

TECH SUPPORT



CONTACT

SALES: 818.786.0536
RENTALS: 818.387.6270
sales@ratpaccontrols.com